


技術資料書

耐高溫聚酯 PET 膠帶 產品編號：1PETS

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852)3585-3181
E-mail : sales@pleo.com * Web Site : www.pleo.com

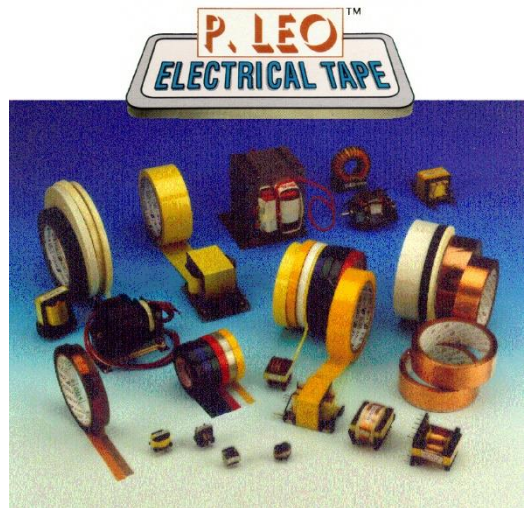

說明： 1PETS 耐高溫聚酯 PET 膠帶是在聚酯薄膜塗覆一層矽膠粘合劑而成。優良的抗溶劑、高粘著力、柔軟服帖、高耐熱性及貼服性，再撕離不留殘膠。在矽膠管及電線有極佳的粘著效果。

用途： 專業用於電路板含浸過程中，遮覆金手指部位，防止電鍍液浸入及污染，保護電路板電鍍，超高溫烤漆及粉末噴塗等工業。

技術資料：	性能	單位	規格
	基材厚度	mm	0.028±0.003
	總厚度	mm	0.050±0.005
	拉伸強度	MPa	≥120
	伸長率	%	≥50
	黏著力	N/25mm	≥7.0
	擊穿電壓	kV	2.0
	耐溫性	--	180°C /30min

測試方法： 根據 ASTM 標準測試

保存期限： 6 個月（溫度：73°F、濕度：65%）

包裝標準： 每卷長 33M & 66M，寬 960mm，卷心直徑 3 英寸

顏色： 透明色、綠色

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

仅供参考，如与英文版有歧异之处，一切内容以英文版为准。

