


TECHNICAL DATA

Double Side Tape

Product Code: 1P2DS

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852) 3585-3181
E-mail : sales@pleo.com * Web Site : www.pleo.com

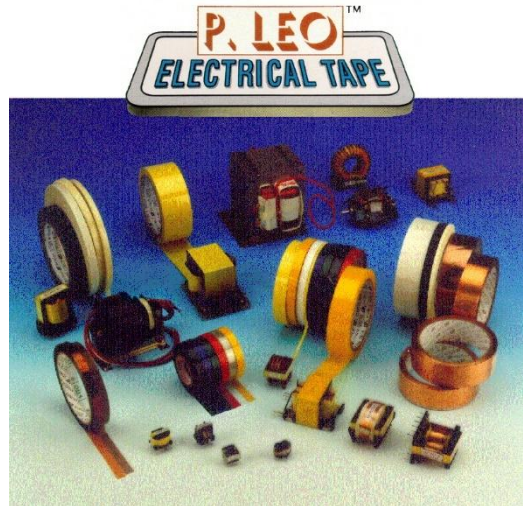

Description: 1P2DS(0.025mm PET film) is a double sided tape with Kraft paper release film, PET film coated with acrylic adhesive

Technical Details:

<u>PROPERTIES</u>	<u>UNIT</u>	<u>SPECIFICATION</u>
BACKING THICKNESS	mm	0.025
TOTAL THICKNESS	mm	0.12±0.005
TENSILE STRENGTH	Kgf/25mm	>10
ELONGATION	%	>100
ADHESION TO STEEL	kgf/25mm	>1.0
UNWINDED FORCE	gf/25mm	1-50
HOLDING POWER	mm	1↓
(25mmx25mmx1kgX80°Cx1hr)		
DIELECTRIC BREAKDOWN	kV	> 5

Test Method : In accordance with ASTM D-1000 method

Shelf Life : 12 months when storage at 73°F and 65% relative humidity

Availability : Standard 50M roll, 3" core, width 1220mm

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

以上僅供參考，如與英文版有歧異之處，一切內容以英文版為準

