


技术资料书

聚酯薄膜胶带
产品编号：1P800
(阻燃)

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852) 3585 3181
E-mail : sales@pleo.com * Web Site : www.pleo.com

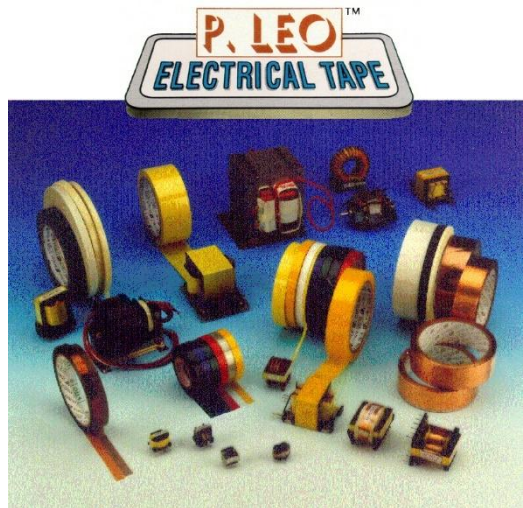

UL FILE #E126174

产品描述： 1P800 是 0.019 毫米厚的聚酯薄膜薄膜，涂有丙烯酸基热固性压敏黏合剂。杰出的高温物理和电气性能保持力。本产品符合 UL 510 的阻燃要求。

应用： 用于高性能电气应用，用于高温线圈，例如曳引机制造、发电机、电容器变压器等的生产。

性能：

项目	单位	规格值
颜色	-	琥珀
总厚度	mm	0.035 ± 0.005
拉伸强度	kgf/25mm	>7
断裂伸长率	%	>50
钢板剥离力	kgf/25mm	0.45-1.0
解卷力	gf/25mm	250-900
击穿电压	kV	>4
温度等级	°C	130

储存条件： 常温65%RH环境中，保质期自出厂日起6个月。

规格： 33M 长，3" 芯，宽 1230 mm

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

