


技术资料书

环氧涂覆 PET 聚酯胶带

产品编号: 1SP10

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Fax : (852) 3585-3181
E-mail : sales@pleo.com * Web Site : www.pleo.com

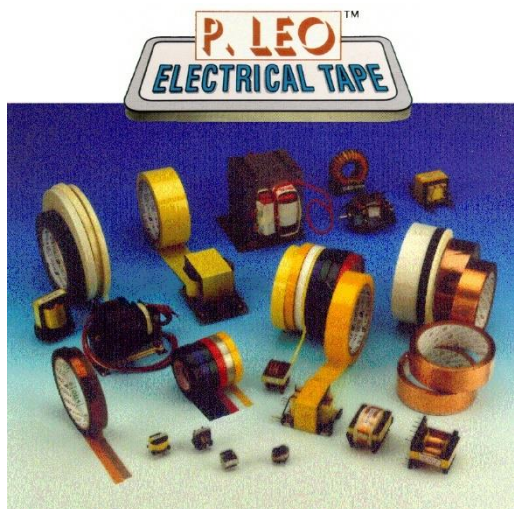

UL FILE #E126174

说明： 1SP10 是 0.130mm 厚度的胶带，由一侧涂有热固性橡胶压敏粘合剂的环氧树脂涂覆 PET 薄膜胶带组成。常用于包装继电器、线圈、变压器、绕线式次分马力罩极电机、棒绕或心轴绕线圈和线束。该胶带通过了 UL 510 阻燃测试。

| 技术数据： | 性能 | 单位 | 规格 |
|-------|------------|-----------------|----------------|
| | 总厚度 | mm | 0.125±0.012 mm |
| | 拉伸强度 | N/25mm | >147 |
| | 伸长率 | % | >80 |
| | 黏着力 | kg/25mm(N/10mm) | >1.1 (4.3) |
| | 击穿电压 | kV | 8 |
| | 耐温性 | °C | 155 |
| | CTI IEC 等级 | N/A | I |

测试方法： 温度等级测试按照 UL 510, CTI 测试按照 IEC 60112, 其他测试按照 ASTM D-1000

保存期限： 6 个月 (温度: 23°C、湿度: 65%)

包装标准： 每卷长 33M & 50M，宽 960/1230mm，卷心直径 3 英寸

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

