

技術資料

ポリイミドテープ


製品番号 : 1K030

P. Leo & Co Ltd

P.O. Box 175 Fo Tan, Shatin, Hong Kong.

Telephone : (852) 2604-8222 * Facsimile : (852) 3585 3181

E-mail : sales@pleo.com * Web Site : www.pleo.com

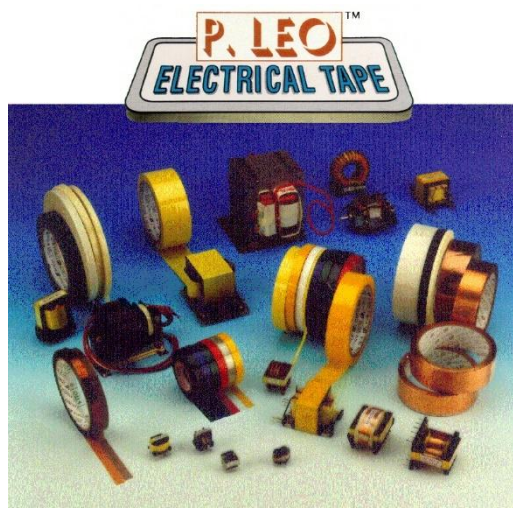

製品説明: 1K030 は 0.11MM 厚みで、片面にシリコーン接着剤を塗布した耐熱ポリイミドテープです。

製品特性 :

項目	単位	規格値
色	-	茶色
基材厚み	mm	0.075±0.004
総厚み	mm	0.110±0.005
引張強度	N/25mm	>200
断裂伸長率	%	>60
SUS 剥離力	N/25mm	>6.5
破壊電圧	kV	>7.5
耐熱温度	°C	-73~+260

テスト基準 : ASTM D-1000

保存期限 : 6 ヶ月 (温度 : 23°C、湿度 : 65%)

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

