


技術資料書

強化絲紋混合纖維膠帶 產品編號:1PG850

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852) 3585-3181
E-mail : sales@pleo.com * Web Site : www.pleo.com

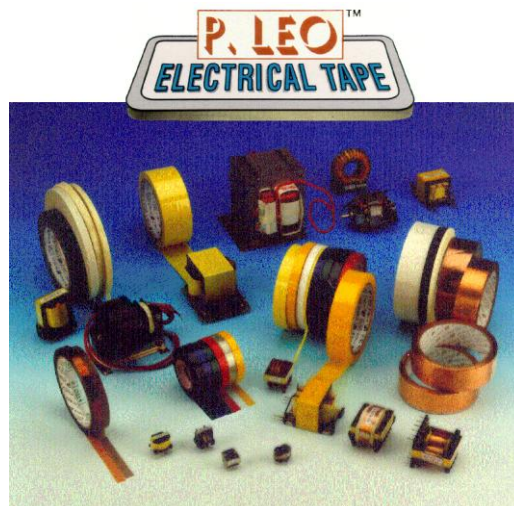

說明 : 1PG850 強化絲紋混合纖維膠帶是用聚酯薄膜混合玻璃纖維, 再塗覆一層丙烯酸酯膠粘劑而成。

應用 : 該膠帶適用於油和空氣填充的傳輸應用和加固, 以及固定和分離地面絕緣。

特點/優點 : 此膠帶額定電壓為 600V, 可承受 0 至 155 ° C 的溫度範圍。聚酯薄膜/強化絲紋基材採用壓敏丙烯酸黏合劑, 確保牢固黏合。這款高斷裂強度膠帶專為需要高介電強度和機械強度的應用而設計。非常適合捆綁馬達線圈和線圈覆蓋。

技術資料 :	性 能	單 位	規 格
	基材厚度	mm	0.025
	總厚度	mm	0.167
	拉伸強度	N/25mm	1200
	伸長率	%	5
	黏著力	90 °N/25mm	20
	擊穿電壓	kV	5
	持久力	h	≥24
	耐熱等級	°C	155

包裝標準 : 每卷長 50M, 寬 950mm, 卷心直徑 3 英寸。

保存期限 : 六個月 (溫度: 23°C 濕度: 65%)

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

以上僅供參考, 如與英文版有歧異之處, 一切內容以英文版為準



Copyright © P. LEO 2010 Rev. 2