


技术数据书

强化丝纹混合纤维胶带 产品编号:1PG850

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852) 3585-3181
E-mail : sales@pleo.com * Web Site : www.pleo.com

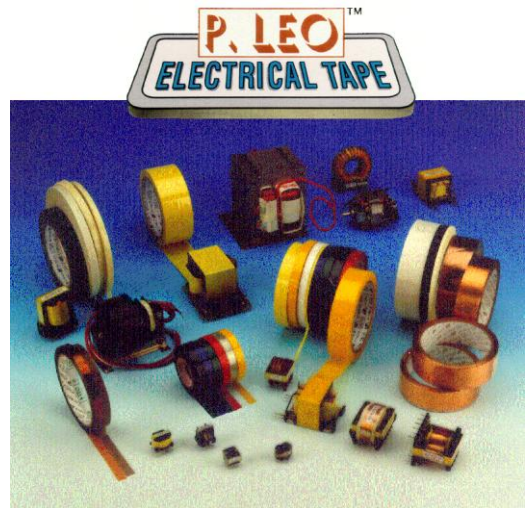

说 明 : 1PG850 强化丝纹混合纤维胶带是用聚酯薄膜混合玻璃纤维, 再涂覆一层丙烯酸酯胶粘剂而成。

应 用 : 该胶带适用于油和空气填充的传输应用和加固, 以及固定和分离地面绝缘。

特点/优点 : 此胶带额定电压为 600V, 可承受 0 至 155 ° C 的温度范围。聚酯薄膜/强化丝纹基材采用压敏丙烯酸黏合剂, 确保牢固黏合。这款高断裂强度胶带专为需要高介电强度和机械强度的应用而设计。非常适合捆绑马达线圈和线圈覆盖。

技术数据 :	性 能	单 位	规 格
	基材厚度	mm	0.025
	总厚度	mm	0.167
	拉伸强度	N/25mm	1200
	伸长率	%	5
	黏着力	90 °N/25mm	20
	击穿电压	kV	5
	持久力	h	≥24
	耐热等级	°C	155

包装标准 : 每卷长 50M, 宽 950mm, 卷心直径 3 英寸。

保存期限 : 六个月 (温度: 23°C 湿度: 65%)

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

以上僅供參考, 如與英文版有歧異之處, 一切內容以英文版為準



Copyright © P. LEO 2010 Rev. 2