


# 技術資料書

## 強化絲紋混合纖維膠帶 產品編號:1PG850

### P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.  
Telephone : (852) 2604-8222 \* Facsimile : (852) 3585-3181  
E-mail : sales@pleo.com \* Web Site : www.pleo.com

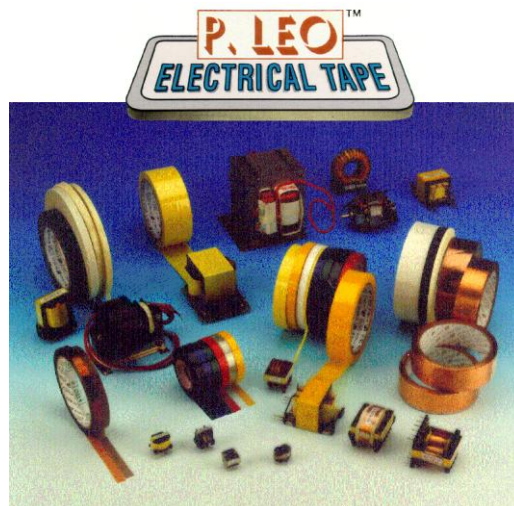

說明： 1PG850 由聚酯薄膜複合玻璃纖維製成，塗覆無腐蝕性丙烯酸壓敏膠粘劑。耐溫等級 F 155℃

應用： 廣泛應用於導線固定，幹式、油浸式變壓器鐵心固定，線圈捆紮等。

特點/優點： 具有抗穿刺、耐磨和抗邊緣撕裂的性能，高拉伸強度，適用於油浸式及幹式變壓器的鐵芯及線圈固定。耐溶劑腐蝕、耐老化，並具有優異的電介質強度和絕緣電阻性能。應用時無濕度等環境要求，無需加熱固化。

技術資料：	性 能	單 位	規 格
	基材厚度	mm	0.025
	總厚度	mm	0.167
	拉伸強度	N/25mm	1200
	伸長率	%	5
	黏著力	90 °N/25mm	20
	擊穿電壓	kV	5
	持久力	h	≥24
	耐熱等級	°C	155

包裝標準： 每卷長 50M，寬 950mm，卷心直徑 3 英寸。

保存期限： 六個月（溫度：23℃ 濕度：65%）

#### **Important Notice to Purchase**

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or \*he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

以上僅供參考，如與英文版有歧異之處，一切內容以英文版為準



Copyright © P. LEO 2010 Rev. 2