


技术数据书

聚酯薄膜胶带 产品编号:1P801c (阻燃性)

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852) 3585-3181
E-mail : sales@pleo.com * Web Site : www.pleo.com

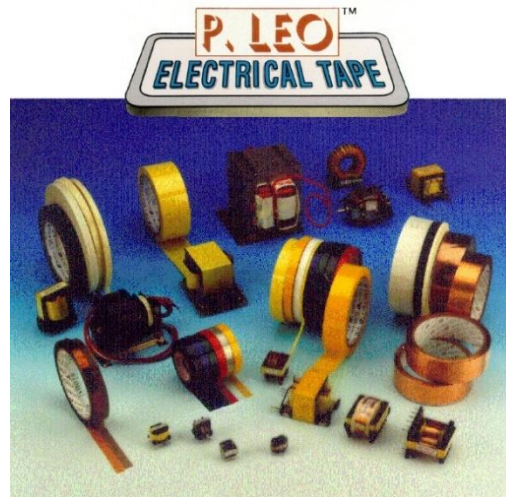

E126174

说明 : 1P801c (0.025mm 薄膜) 聚酯薄膜胶带是在聚酯薄膜涂覆一层压敏丙烯酸酯胶粘剂而成, 高介电强度、薄而坚韧。符合 UL510A 阻燃要求。

应用 : 适用于电器产品, 例如电容器和线圈外层包裹, 稳固变压器结构。属于 B 级绝缘材料。

技术数据 :	性能	单位	规格
	总厚度	mm	0.055 ± 0.005
	拉伸强度	kg/25mm	>9
	伸长率	%	>70
	黏着力	kg/25mm	>0.8
	击穿电压	kV	>5
	耐热等级	°C	130
	相对漏电起痕指数 (CTI)	—	PLC 0

测试方法 : 根据 ASTM 标准测试

保存期限 : 6 个月 (温度: 23°C、湿度: 65%)

包装标准 : 每卷长 33/50M, 宽 960/1230mm, 卷心直径 3 英寸

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

以上僅供參考, 如與英文版有歧異之處, 一切內容以英文版為準



Copyright © P. LEO 2009 Rev. 2