


技术资料书

聚酰亚胺胶带

产品编号 : 1K7270NU

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852) 3585-3181
E-mail : sales@pleo.com * Web Site : www.pleo.com

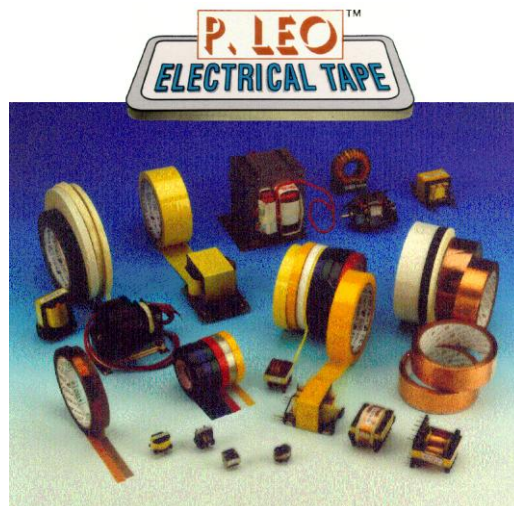

说明 : 1K7270NU 聚酰亚胺胶带是在 2mil 厚的聚酰亚胺薄膜涂覆一层高温的热固化硅胶压敏粘合剂而成。

用途 : 设计用于高性能的分马力电机线圈绝缘层。优秀的捆绑和保护外包装的应用。

特点/优点 : 聚酰亚胺薄膜的基材提供了高舒适性。
在高温的环境下, 提供磨损保护和耐穿刺。
高性能有机硅粘合剂是专为高温性能和抗溶剂污染。

技术数据 :	性 能	单 位	规 格
	颜 色:	-	琥珀色 (茶色)
	总厚度	mm(mil)	0.09 ± 0.005 (3.5)
	拉伸强度	kg/25mm(lb/in)	30 (65)
	伸长率	%	60
	黏着力	kg/25mm(oz/in)	0.55 (20)
	击穿电压	kV	8.5
	温度等级	°C	180

包装标准 : 每卷长 33M, 宽 406mm, 卷心直径 3 英寸

保存期限 : 六个月 (温度: 23°C 湿度: 65%)

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

仅供参考, 如与英文版有歧异之处, 一切内容以英文版为准。



Copyright © P. LEO 2009 Rev. 1