


技術資料書

聚酰亞胺膠帶 產品編號:1K7270NU

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Facsimile : (852) 3585-3181
E-mail : sales@pleo.com * Web Site : www.pleo.com

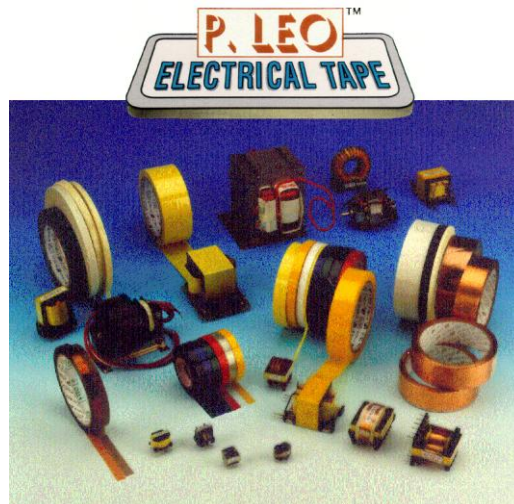

說明： 1K7270NU 聚酰亞胺膠帶是在 2mil 厚的聚酰亞胺薄膜塗覆一層高溫的熱固化矽膠壓敏粘合劑而成。

用途： 設計用於高性能的分馬力電機線圈絕緣層。優秀的捆綁和保護外包裹的應用。

特點/優點： 聚酰亞胺薄膜的基材提供了高舒適性。在高溫的環境下，提供磨損保護和耐穿刺。高性能有機矽粘合劑是專為高溫性能和抗溶劑污染。

技術資料：	性能	單位	規格
	顏色	-	琥珀色 (茶色)
	總厚度	mm (mil)	0.09 ± 0.005 (3.5)
	拉伸強度	kg/25mm (lb/in)	30 (65)
	伸長率	%	60
	黏著力	kg/25mm (oz/in)	0.55 (20)
	擊穿電壓	kV	8.5
	溫度等級	°C	180

包裝標準： 每卷長 33M，寬 406mm，卷心直徑 3 英寸

保存期限： 六個月（溫度：23°C 濕度：65%）

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

以上僅供參考，如與英文版有歧異之處，一切內容以英文版為準



Copyright © P. LEO 2009 Rev. 1