

# 技术数据书

## 芳香聚酰胺纸胶带

产品编号:1N012N


(阻燃性)

### P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.

Telephone : (852) 2604-8222 \* Facsimile : (852) 3585-3181

E-mail : sales@pleo.com \* Web Site : www.pleo.com

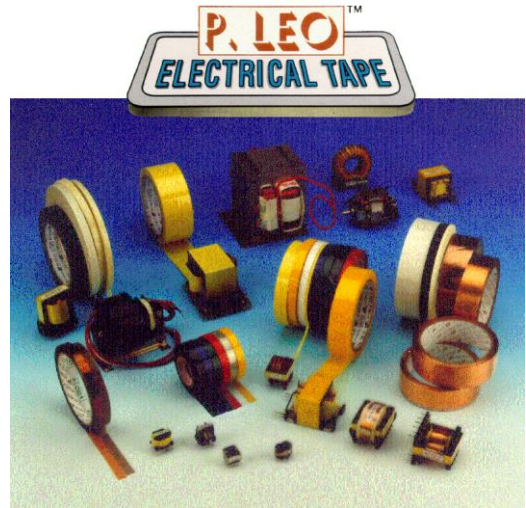

说明 : 1N012N 芳香聚酰胺纸胶带是在 3mil (0.08mm) 厚的 NOMEX® 纸涂覆一层 丙烯酸酯胶粘剂 而成, 具有良好的 抗溶性 和 阻燃性。符合 UL510A 阻燃要求。

用途 : 适用于变压器、电动马达、线圈包裹及电容器上, 在浸渍中具有良好的吸漆性。最高可应用于 N 级的绝缘系统中。

技术数据 :	性能	单位	规格
	颜色	-	白色
	总厚度	mm	0.145±0.015
	基材厚度	mm	0.08
	拉伸强度	kgf/25mm	>12
	伸长率	%	>5
	黏附力	kgf/25mm	>0.6
	击穿电压	kV	>2.5
	耐热等级	°C	200

\*NOMEX 是美国杜邦公司的注册商标

测试方法 : 根据 ASTM 标准测试

保存期限 : 12 个月 ((温度: 23°C、湿度: 65%))

包装标准 : 每卷长 30M, 宽 440mm, 卷心直径 3 英寸

#### **Important Notice to Purchase**

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or \*he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

以上僅供參考, 如與英文版有歧異之處, 一切內容以英文版為準



Copyright © P. LEO 2010 Rev. 3