


技術資料書

環氧塗覆 PET 聚酯膠帶

產品編號: 1SP10

P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.
Telephone : (852) 2604-8222 * Fax : (852) 3585-3181
E-mail : sales@pleo.com * Web Site : www.pleo.com

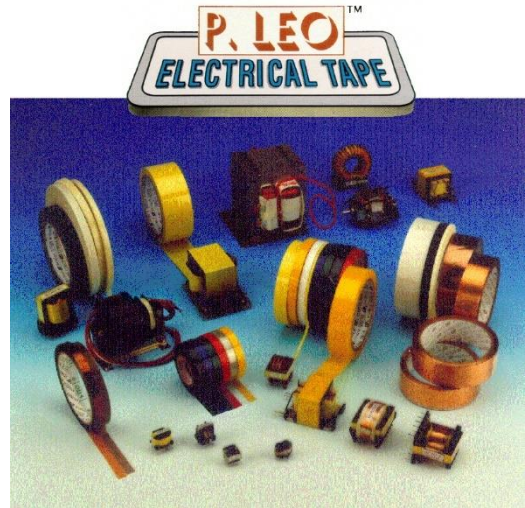

UL FILE #E126174

說明： 1SP10 是 0.130mm 厚度的膠帶，由一側塗有熱固性橡膠壓敏粘合劑的環氧樹脂塗覆 PET 薄膜膠帶組成。常用於包裝繼電器、線圈、變壓器、繞線式次分馬力罩極電機、棒繞或心軸繞線圈和線束。該膠帶通過了 UL 510 阻燃測試。

技術資料：	性 能	單 位	規 格
	總厚度	mm	0.125±0.012 mm
	拉伸強度	N/25mm	>147
	伸長率	%	>80
	黏著力	kg/25mm(N/10mm)	>1.1 (4.3)
	擊穿電壓	kV	8
	耐溫性	°C	155
	CTI IEC 等級	N/A	I

測試方法： 溫度等級測試按照 UL 510, CTI 測試按照 IEC 60112, 其他測試按照 ASTM D-1000

保存期限： 6 個月 (溫度：23°C、濕度：65%)

包裝標準： 每卷長 33M & 50M，寬 960/1230mm，卷心直徑 3 英寸

Important Notice to Purchase

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or *he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

