


# 技術資料書

## 聚醯亞胺膠帶 產品編號：1K030

### P. LEO & CO LTD

P.O. Box 175 Fo Tan, Shatin, Hong Kong.  
Telephone : (852) 2604-8222 \* Facsimile : (852) 3585 3181  
E-mail : sales@pleo.com \* Web Site : www.pleo.com

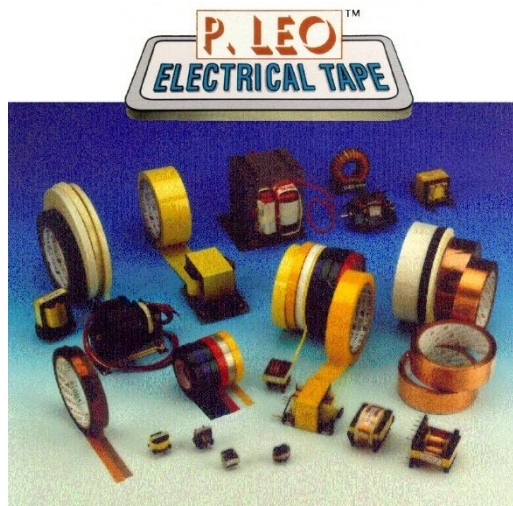

**產品描述:** 1K030 是 0.11 毫米厚的聚醯亞胺薄膜膠帶，塗有矽膠水的高溫單面膠帶。

#### 性能：

項目	單位	規格值
顏色	-	琥珀
基材厚度	mm	0.075±0.004
總厚度	mm	0.110±0.005
拉伸強度	N/25mm	> 200
斷裂伸長率	%	> 60
鋼板剝離力	N/25mm	> 6.5
耐壓力	kV	> 7.5
耐溫性	°C	-73~+260

**測試方法：** ASTM D-1000

**儲存條件：** 常溫65%RH環境中，保質期自出廠日起6個月。

#### **Important Notice to Purchase**

All Statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed and the following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace such quantity of the product of the product proved to be defective. Neither seller nor manufacturer shall be liable for any injury loss or damage direct or consequential arising out of the use of or \*he inability to use the product. Before using users shall determine the suitability of the product for their intended uses and users assume all risk and liability whatsoever in connection there with.

No statement or recommendation not contained herein shall have any force or effect unless in an agreement signed by officers of Seller and manufacturer.

